

## LNL-1200-16DO


### Overview

All boards in the Lenel M Series have been designed to facilitate the migration of legacy Picture Perfect, FCWnx, or Secure Perfect Systems to Lenel's OnGuard® System. The Lenel M Series boards provide a one-for-one, plug-compatible, OnGuard-ready replacement for Legacy CASI M5 and M3000 boards. The migration is a straightforward process of powering down the legacy controller, unplugging field wiring from legacy boards, removing legacy boards, inserting new Lenel M Series boards, plugging in field wiring, and powering up new controller which communicates to the OnGuard System.

The LNL-1200-16DO is the replacement for the legacy CASI 16DO board (PN:110071001). The LNL-1200-16DO supports 16 open collector outputs. 12/24 VDC can be externally supplied to the board, and used to trigger relays or drive low voltage/low amperage devices. Note: Each LNL-1200-16DO uses one board address.

Lenel M Series Boards are Mercury Authentic, which means they are manufactured by, and conform to, Mercury Security SDK.

Legacy CASI M Series Boards cannot be mixed with Lenel M Series Boards. If converting M5 or M3000 controller to Lenel M Series, then all boards in that controller must be converted to Lenel M Series.

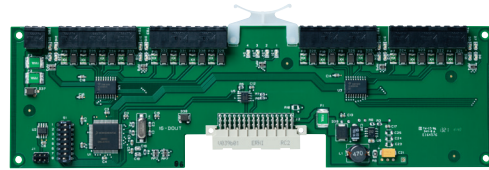

### FEATURES

- Mercury Hardware for OnGuard, redesign to retrofit into Legacy CASI Controllers
- Replaces CASI 16DO, field wiring plug compatible
- Supports 16 Open Collector Outputs, for controlling relays for control devices (horns, lights, barriers, etc).
- Mercury Authentic Hardware

Power & Communications	
Power	Supplied from LNL-3300-M5 or LNL-8000-MCOM via backplane, 12 VDC +/- 10% (30mA)
Communications Ports	Backplane: RS-485
Connectivity	
Reader Interfaces	N/A
Inputs	N/A
Outputs	16 open collector outputs, 0.4A@24VDC, maximum per output
Cabling Requirements	As required for load
Mechanical	
Dimensions	3.5" W x 10.25" L x 0.69" H (88.9mm W x 260.4mm L x 17.5mm H)
Weight (w/o connectors)	3.5oz (105g)
Environmental	
Temperature Storage	-65°F to 185°F (-55°C to 85°C)
Temperature Operating	32°F to 158°F (0°C to 70°C)
Humidity	RHNC 5 to 95%
Cardholder capacity	N/A
Offline Transaction Buffer	N/A
Card Formats	N/A
Max Badge Length	N/A
Compliance Approvals	RoHS, FCC, CE, UL 294, UL 1076

Part Number	Description
LNL-3300-M5	Intelligent System Controller, 12 VDC @300mA; Size 4.56" W x 10.25" L x 0.8" H (115.8mm W x 260.4mm L x 20.3mm H) RoHS
LNL-8000-MCOM	Power/Communications Module-Provides RS485 comm & Power to enclosure; Size 4.56" W x 10.25" L x 0.8" H (115.8mm W x 260.4mm L x 20.3mm H) RoHS
LNL-1320-2RP	Dual Reader Interface Module (Supports Wieg, Mag or SF2F Rdr) 12 VDC; 2 Rdr interface; W/M 4 inputs; 6 (5A) form C relays; RoHS
LNL-1320-S2RP	Dual Reader Interface Module (Supports Wieg, Mag or SF2F Rdr) 12 VDC; 2 Rdr interface; W/M 4 inputs; 6 (5A) form C relays; RoHS
LNL-1380-8RP	Eight Reader Interface Module (Supports SF2F Rdr) 12 VDC; 8 Rdr interface; RoHS
LNL-1200-16DO	Output Control Module 12 VDC; 16 driver array module; RoHS
LNL-1200-16DOR	Output Control Module 12 VDC; 16 relay output control module; RoHS
LNL-1100-20DI	Input Control Module 12 VDC; 20 zone input module; RoHS

[lenel.com](http://lenel.com)

(866) 788-5095

Specifications subject to change without notice.

© 2014 Lenel Systems International, Inc. All rights reserved. All other trademarks and copyrights are the property of their respective owners.

LNL\_TS\_1200-16DO\_063014

